

HOTEC

HAND DRYER

SENSOR OPERATED

SPEED



Reference: 11.295

ABS

white colour (other colours option)

COMPONENTS & MATERIALS

- One-piece cover.
- High speed brush motor.
- Strong, vandal proof and build without edges.
- Universal brush motor incorporating a safety thermal cut-off.
- Element incorporates a safety thermal cut-off.
- Top hygiene level by integrated UV-C lamp and inbuilt antibacterial filter as standard equipment.
- A LED light shines when activated.
- Easy maintenance.
- Dimension: 260 high x 203 wide x 165 deep mm.


TECHNICAL SPECIFICATIONS

· Material	ABS
· Cover thickness	3.0 mm thick
· Voltage/Frequency	AC220V, 50/60Hz
· r.p.m.	26000
· Total power	1000W
· Motor power	500W
· Consumption	4.5A
· Air velocity	80m/s
· Air temperature	45°C
· Noice level	<72dB
· Protection level	IPX3
· UV-C lamp	YES

CERTIFICATE



TECHNICAL DRAWING

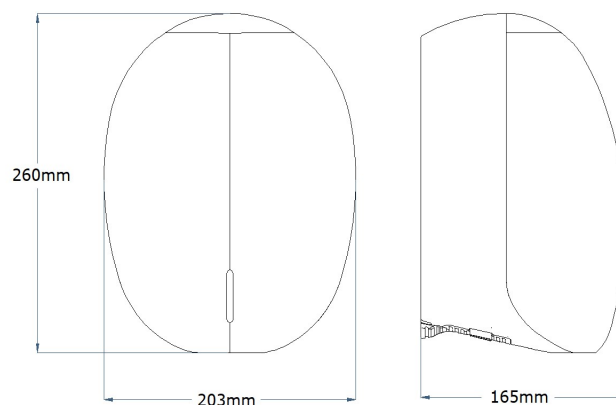

Tel: +86 571 888 685 70

hotec@cnhotec.com

Fax: +86 571 888 685 71

www.cnhotec.com