

HAND DRYER

SENSOR OPERATED

JET



Reference: 11.115 AISI 304 stainless steel satin

COMPONENTS & MATERIALS	TECHNICAL SPECIFICATIONS
•Overall stainless steel food grade 304 satin finish.	• Material AISI 304 stainless steel
·High speed self-developed brushless motor.	• Cover thickness 1.0 mm thick
\cdot 3 IR sensors in both sides for automatic hands	· Voltage/Frequency AC220V, 50/60Hz
detection.	· r.p.m. 19000-20000
·With plasma. Disinfect the hand dryer and the	• Total power 1800W
surrounding areasimultaneously. HEPA filter which	• Motor power 800W
avoids the entry of the tinyparticles.	• Heating element power 1000W
•Internal tank to collect the water and avoid a mess.	· Air velocity 100m/s
•Designed for high traffic bathroom and continuous	· Air temperature 20-40℃
use.	· Noice level <68dB
·Easy maintenance.	· Protection level IP34
Dimension: 660 high x 290 wide x 180 deep mm.	• Drying time 5-10s
·Warranty: 3 years.	
CERTIFICATE	TECHNICAL DRAWING
CE	180mm 85mm 7° 163mm 290mm

FEATURES

·Overall stainless steel food grade 304, including inner structures & install screws.

·No openings or cracks on the surface, easy to clean dirt, no chance for bacteria survive.

 $\cdot No$ fear of fire, burning cigarette butts. Scratch can be repaired.

·Sealing material CR4305.





•Adopting a complete closed structure to protect brushless motor and stainless steel rotor, last up to 10 years.






·Use SPIC super-energy ion generator to release trillions of positive and negative ions.

·Degradation of organic matter. Eliminate smoke, odor...Static electrode absorbs dust, PM2.5.

·Without emission of ultraviolet rays and ozone. Produce negative ions and improve air quality.

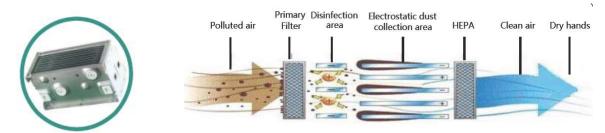

·Washable with water. Disinfect with disinfectant, ultraviolet rays and hot water.

·Use vacuum cleaner and air blower (colder) to clean HEPA filter.

·Outer filter can be washed for repeated use.

·Warranty: 3 years.





Tel: +86 571 888 685 70 Fax: +86 571 888 685 71 hotec@cnhotec.com www.cnhotec.com